



# INTERLUX

THE BRAND OF QUALITY



**THE BRAND OF INDIA**

AN ISO 9001-2015 Co.





## ABOUT US

In an attempt to provide globally recognized painting solutions, **Interlux Paints** has perfectly blended international expertise with Indian heartedness. To be more specific, **Interlux paints** has tried to grab best painting solutions around the world that best suits the Indian climatic conditions and its Indian customers.

For these reasons, **Interlux Paints** manufactures its products using two main guidelines: first, the research and formulation of products that offers the lowest environmental impact & the most improved toxicological characteristics, and second through the availability of material data sheets that include such information as product safety, toxicology and environmental impact. By working within the laws and regulations of our industry, **Interlux Paints** coatings are committed to responsible manufacturing by employing the latest technology in every aspect of the production process. Such processes are constantly evolving with the goal of reducing possible negative impacts on the environment.

Since the founding, **Interlux Paints** has stood for quality and innovation in the paint industry. The name has been always associated with high quality paint products. And by constantly monitoring emerging technologies and raw materials, Interlux delivers the top-of-the line paint products to its customers brand "**Interlux**" won recognition for its superior performance, when a leading consumer testing organization called it " best performing latex paint in the market today.

"In the era of modernization, **Interlux Paints** tried to deliver world's best quality paint products to its customers, which would be best worth the prices they would be paying for. Generally the companies try to actually fool people by spending a huge budget on advertising and thereby creating a demand of their products. These companies charge a nice price of their products simply as to cover their advertising cost and in lieu of it supplies a product whose coat is actually higher than its real and original price. But here at **Interlux Paints** the policy and thought some what differs from these companies. At **Interlux Paints** it is believed that if the money is used to create exceptional products you won't require it to be spending big on advertising.

Ultimately the motto of **Interlux Paints** is to deliver world's best paint which doesn't harm our environment and our fellow beings, at the best affordable price. **Interlux** products are formulated and manufactured not only keeping the safety in mind of its end customers, but also for the safety its employees.







# INTERLUX

THE BRAND OF QUALITY

INTRODUCING  
PAINTS FOR  
THE WALL  
*that has everything...*







## EXTERIOR FINISHES

Exteriors are a reflection of "who you are". Be it new or old, be it larger or smaller every home has its own unique personality, bidding you a familiar Welcome whenever you return.

Aryan Paints offers a complete family of Exterior Paints for every application and affordable price range. Aryan Paints Exterior range provides ultimate exterior durability, a tough surface to protect from severe weather, high hiding for greater coverage, superior adhesion, stain and dirt resistance.





## SIGNATURE LUXURY INTERIOR & EXTERIOR EMULSION

**DURABILITY:** Paint Life 7-8years\*

**AREA OF APPLICATION:** Ceiling, False Ceiling & Plaster / Concrete / Brick Work, etc.  
It is a premium quality paint that provides a luxurious, silky finish to interior walls.

Method of Application	Brush, Roller or Spray
Dilution	Water Ratio 200-400ml. Per Ltr.
Drying Time	Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	At an interval of 2-4 hours
Coating System	2-3 Coats as required
Coverage	280-320 sq.ft. per ltr. 1 Coat 160-180 sq.ft. per ltr. 2 Coat
Shade	White & All Bases are also Available
Packaging	20ltr, 10tr, 4ltr. & 1ltr

### FEATURES

- Antimicrobial fungus resistant coating.
- Stains wash off easily, superior scrubability.
- Resists scuffs & stains.
- Low Odour & Low VOC.
- Moisture resistant.
- Excellent hiding, especially in dark colors



# Signature

*Interior & Exterior*  
**LUXURY EMULSION**





## SEMI GLOSS INTERIOR & EXTERIOR EMULSION



**DURABILITY:** Paint Life 4-5years\*

**AREA OF APPLICATION:** It is used in new construction and on repaint applications where a flat finish and good durability is required. Recommended for exterior applications over properly prepared concrete, masonry, aggregate block, Cement & Plastered Walls.

Method of Application	: Brush, Roller or Spray
Dilution	: Water Ratio 200-400ml. Per Ltr.
Drying Time	: Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	: At an interval of 2-4 hours
Coating System	: 2-3 Coats as required
Shade	: White & All Bases are also Available
Packaging	: 20ltr, 10tr, 4ltr. & 1ltr
Coverage	: 260-300 sq. ft per ltr. in 1 Coat 140-160 sq. ft per ltr. in 2 Coat

### FEATURES

- Excellent hiding especially in dark colors.
- Resistant to fading, cracking, peeling, blistering etc.
- Excellent flow and leveling.
- Best adhesion and excellent resistance to chalking.





## WEATHER GUARD EXTERIOR EMULSION




**DURABILITY:** Paint Life 4-5years\*

**AREA OF APPLICATION:** It is used in new construction and on repaint applications where a flat finish and good durability is required. Recommended for exterior applications over properly prepared concrete, masonry, aggregate block, Cement & Plastered Walls.

Method of Application	:	Brush, Roller or Spray
Dilution	:	Water Ratio 200-400ml. Per Ltr.
Drying Time	:	Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	:	At an interval of 2-4 hours
Coating System	:	2-3 Coats as required
Shade	:	White & All Bases are also Available
Packaging	:	20ltr, 10tr, 4ltr. & 1ltr
Coverage	:	160-180 sq. ft per ltr. in 1 Coat 80-100 sq. ft per ltr. in 2 Coat

### FEATURES

- Excellent hiding especially in dark colors.
- Resistant to fading, cracking, peeling, blistering etc.
- Excellent flow and leveling.
- Best adhesion and excellent resistance to chalking.

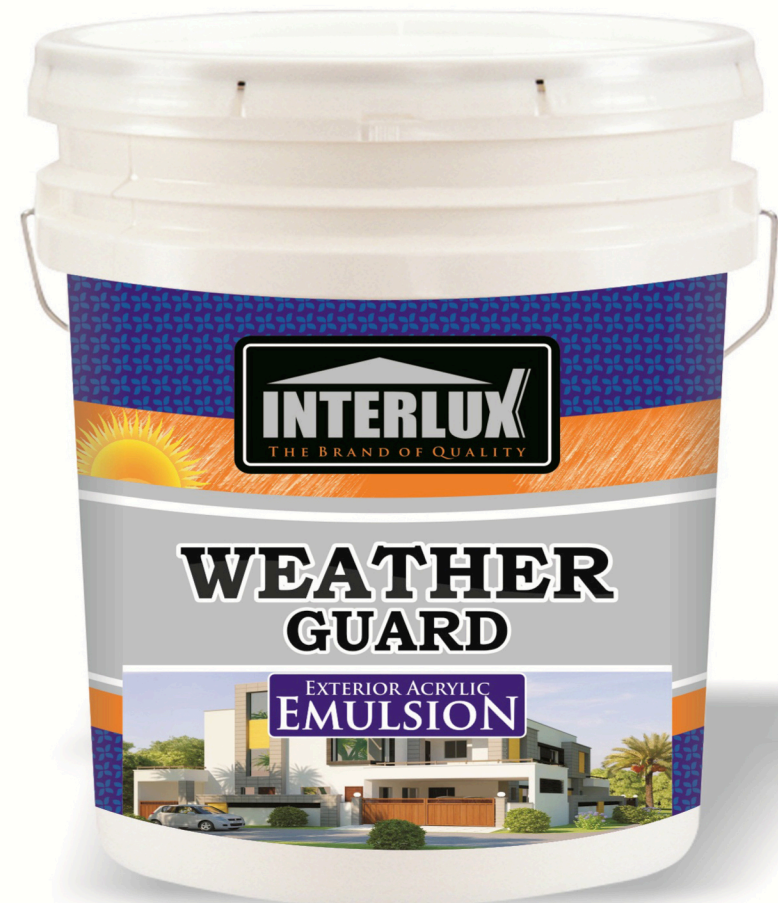



## 4in1 PREMIUM INTERIOR & EXTERIOR EMULSION


**DURABILITY :** Paint Life 5 Years\*

**AREA OF APPLICATION:** Ceiling, False Ceiling & Plaster / Concrete / Brick Work, etc.  
It is a premium quality paint that provides interior & exterior walls.

Method of Application	Brush, Roller or Spray
Dilution	Water Ratio 200-400ml. Per Ltr.
Drying Time	Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	At an interval of 2-4 hours
Coating System	2-3 Coats as required
Coverage	150-170 sq.ft. per ltr. 1 Coat 75-95 sq.ft. per ltr. 2 Coat
Shade	White & All Bases are also Available
Packaging	20ltr, 10tr, 4ltr. & 1ltr

### FEATURES

- Antimicrobial fungus resistant coating.
- Stains wash off easily, superior scrubability.
- Resists scuffs & stains.
- Low Odour & Low VOC.
- Moisture resistant.
- Excellent hiding, especially in dark colors

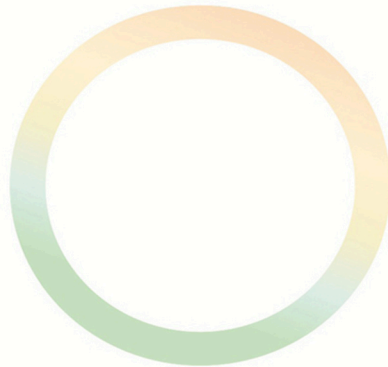

**4in1**  
POWER PACK

**PREMIUM EMULSION**  
INTERIOR & EXTERIOR





## INTERLUX X-COAT SHYNE EXTERIOR EMULSION

**DURABILITY** : Paint Life 3-4 Years\*

**AREA OF APPLICATION** : Ceiling, False Ceiling & Plaster / Concrete / Brick Work etc.  
It is a premium quality paint that provides to exterior walls.

Method of Application	: Brush, Roller or Spray
Dilution	: Water Ratio 200-400ml. Per Ltr.
Drying Time	: Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	: At an interval of 2-4 hours
Coating System	: 2-3 Coats as required
Shade	: White & All Bases are also Available
Packaging	: 20ltr, 10tr, 4ltr. & 1ltr
Coverage	: 100-120 sq. ft per ltr. in 1 Coat 70-90 sq. ft per ltr. in 2 Coat

### FEATURES

- Antimicrobial fungus resistant coating.
- Stains wash off easily, superior scrubability.
- Resists scuffs & stains.
- Low Odour & Low VOC.
- Moisture resistant.
- Excellent hiding, especially in dark colors



**INTERLUX**

**X-COAT**  
*Shyne*





## X-COAT EXTERIOR EMULSION



**DURABILITY:** Paint Life 3years\*

**AREA OF APPLICATION:** It is used in new construction and on repaint applications where a flat finish and good durability is required. Recommended for exterior applications over properly prepared concrete, masonry, aggregate block, Cement & Plastered Walls.

Method of Application	:	Brush, Roller or Spray
Dilution	:	Water Ratio 200-400ml. Per Ltr.
Drying Time	:	Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	:	At an interval of 2-4 hours
Coating System	:	2-3 Coats as required
Shade	:	White
Packaging	:	20ltr, 10tr, 4ltr. & 1ltr
Coverage	:	100-120 sq. ft per ltr. in 1 Coat 70-90 sq. ft per ltr. in 2 Coat

### FEATURES

- Resistant to fading, cracking, peeling, blistering etc.
- Excellent flow and leveling.
- Best adhesion and excellent resistance to chalking.
- Anti Fungus





## ULTRA EXTERIOR EMULSION



**AREA OF APPLICATION:** Ceiling, False Ceiling & Plaster / Concrete / Brick Work, etc.  
It is a premium quality paint that provides to exterior walls.

Method of Application	Brush, Roller or Spray
Dilution	Water Ratio 200-400ml. Per Ltr.
Drying Time	Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	At an interval of 2-4 hours
Coating System	2-3 Coats as required
Coverage	90-110 sq.ft. per ltr. 1 Coat 45-55 sq.ft. per ltr. 2 Coat
Shade	White & All Bases are also Available
Packaging	20ltr, 10tr, 4ltr. & 1ltr

### FEATURES

- Antimicrobial fungus resistant coating.
- Stains wash off easily, superior scrubability.
- Resists scuffs & stains.
- Low Odour & Low VOC.
- Moisture resistant.
- Excellent hiding, especially in dark colors



ECO  
FRIENDLY



APPLICATOR  
FRIENDLY



NO HARMFUL  
CHEMICALS

# ULTRA EXTERIOR EMULSION





## BRIGHT PREMIUM INTERIOR EMULSION



**DURABILITY / LIFE:** (Paint Life 4years)\*

**AREA OF APPLICATION:** It is used in new construction and on repaint applications where a flat finish and good durability is required. Recommended for exterior applications over properly prepared concrete, masonry, aggregate block, Cement & Plastered Walls.

Method of Application	: Brush, Roller or Spray
Dilution	: Water Ratio 200-400ml. Per Ltr.
Drying Time	: Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	: At an interval of 2-4 hours
Coating System	: 2-3 Coats as required
Shade	: White & All Bases are also Available
Packaging	: 20ltr, 10tr, 4ltr. & 1ltr

### FEATURES

- Antimicrobial fungus resistant coating.
  - Stains wash off easily, superior scrubability.
  - Resists scuffs & stains.
  - Low Odour & Low VOC.
  - Moisture resistant.
- Excellent hiding, especially in dark colors





## SAFECOAT INTERIOR EMULSION



**DURABILITY / LIFE:** (Paint Life 2-3years)\*

**AREA OF APPLICATION:** It is used in new construction and on repaint applications where a flat finish and good durability is required. Recommended for exterior applications over properly prepared concrete, masonry, aggregate block, Cement & Plastered Walls.

Method of Application	:	Brush, Roller or Spray
Dilution	:	Water Ratio 200-400ml. Per Ltr.
Drying Time	:	Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	:	At an interval of 2-4 hours
Coating System	:	2-3 Coats as required
Shade	:	White & All Bases are also Available
Packaging	:	20ltr, 10tr, 4ltr. & 1ltr

### FEATURES

- Antimicrobial fungus resistant coating.
- Stains wash off easily, superior scrubability.
- Resists scuffs & stains.
- Low Odour & Low VOC.
- Moisture resistant.
- Excellent hiding, especially in dark colors





## SPEED ULTRA-9 INTERIOR EMULSION

**AREA OF APPLICATION:** Ceiling, False Ceiling & Plaster / Concrete / Brick Work, etc.  
It is a premium quality paint that provides to interior walls.

Method of Application	Brush, Roller or Spray
Dilution	Water Ratio 200-400ml. Per Ltr.
Drying Time	Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	At an interval of 2-4 hours
Coating System	2-3 Coats as required
Coverage	100-260 sq.ft. per ltr. 1 Coat 60-70 sq.ft. per ltr. 2 Coat
Shade	White & All Bases are also Available
Packaging	20ltr, 10tr, 4ltr. & 1ltr

### FEATURES

- Antimicrobial fungus resistant coating.
- Stains wash off easily, superior scrubability.
- Resists scuffs & stains.
- Low Odour & Low VOC.
- Moisture resistant.
- Excellent hiding, especially in dark colors



ECO  
FRIENDLY



APPLICATOR  
FRIENDLY



NO HARMFULL  
CHEMICALS



# SPEED

## ULTRA-9 INTERIOR EMULSION





## INTERLUX PREMIUM ACRYLIC DISTEMPER / PUTTY

**DURABILITY:** Paint Life 2.5years\*

**AREA OF APPLICATION:** Ceiling, False Ceiling & Plaster / Concrete / Brick Work, etc.

Method of Application	:	Brush, Roller, Knife
Dilution	:	Water Ratio 500ml. Per Kg. (Acrylic Wallputty dose not Dilute Water.)
Drying Time	:	Surface dry 3-4 Hrs/Hard dry-24-48 Hrs.
Re-coat Time	:	At an interval of 6 hours
Coating System	:	2-3 Coats as required
Shade	:	All Shades
Packaging	:	20Kg, 10Kg, 5Kg, 1Kg

### FEATURES

- Stains wash off easily, superior scrubability.
- Resists scuffs & stains.
- Low Odour & Low VOC.





## INTERLUX OIL BOND DISTEMPER

**DURABILITY:** Paint Life 2.5years\*

**AREA OF APPLICATION:** Ceiling, False Ceiling & Plaster / Concrete / Brick Work, etc.

Method of Application	: Brush, Roller, Knife
Dilution	: Water Ratio 500ml. Per Kg.
Drying Time	: Surface dry 3-4 Hrs/Hard dry-24-48 Hrs.
Re-coat Time	: At an interval of 6 hours
Coating System	: 2-3 Coats as required
Shade	: All Shades
Packaging	: 20Kg, 10Kg, 5Kg, 1Kg

### FEATURES

- Stains wash off easily, superior scrubability.
- Resists scuffs & stains.
- Low Odour & Low VOC.



# SPEED

## ULTRA-7 OIL BOND DISTEMPER






## INTERLUX WOOD FILLER

**AREA OF APPLICATION:** Interlux Wood Filler is a substance used to fill imperfections, such as nail holes, in wood prior to finishing. It is often composed of wood dust combined with a binder that dries and a diluent (thinner), and, sometimes, pigment." Wood fillers can also be made of synthetic materials that will often accept wood finishing products.

Method of Application	:	Knife
Dilution	:	No Required
Drying Time	:	Surface dry 3-4 Hrs/Hard dry-24-48 Hrs.
Re-coat Time	:	At an interval of 6 hours
Coating System	:	2-3 Coats as required
Shade	:	White, Teak, Walnut
Packaging	:	1Kg.


### FEATURES

- Stains wash off easily, superior scrubability.
- Resists scuffs & stains.
- Low Odour & Low VOC.

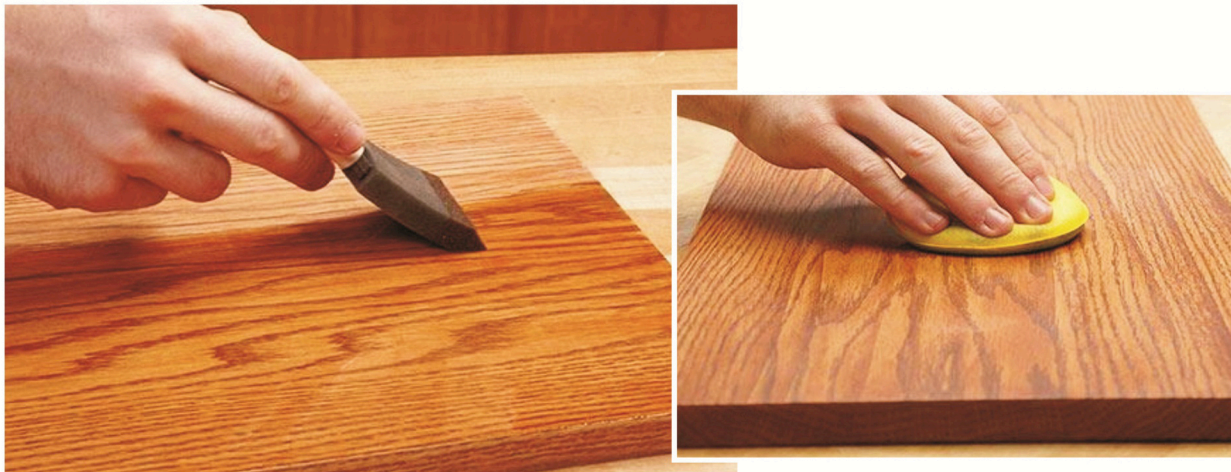

## ELITE WOOD FILLER

ACRYLIC LATEX FOR WOODEN SURFACES

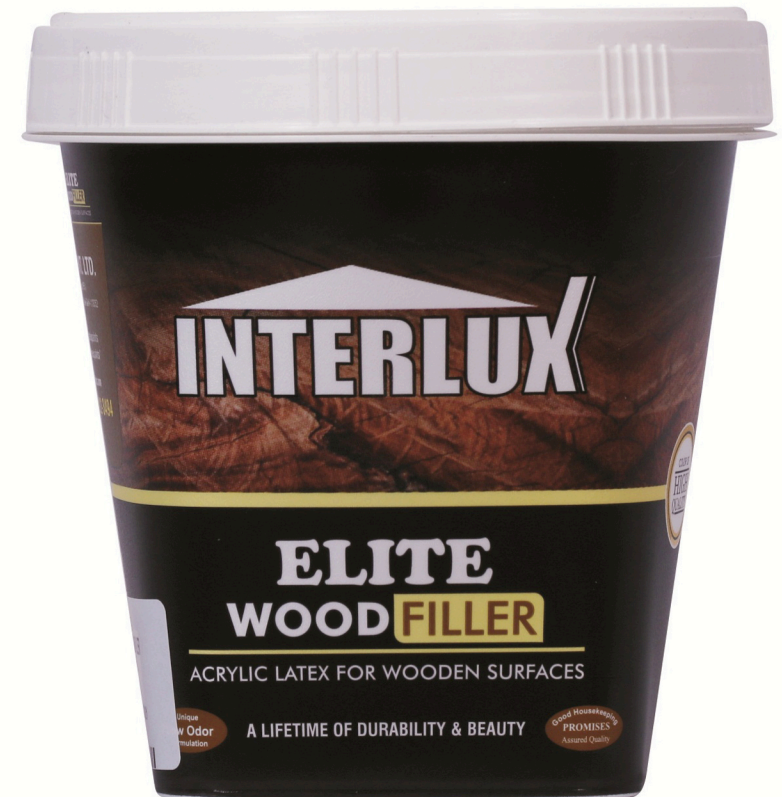





## PRIMER PRODUCTS

Primers can be used as base coat for all types of exterior & interior emulsions. Its has been formulated primarily to compliment the performance of all type of emulsions.

- Fill surface imperfections such as hairline cracks for a uniform painting surface.
- Adhere to and cover surfaces thoroughly.
- Seal off stains that may otherwise show.
- Apply Interlux Paints primers on wide range of painted or unpainted surfaces.



## INTERLUX PRIMESEAL WALL SEALER

**USES:** Prime Seal Wall Sealer has been manufactured for above grade masonry surfaces where a high performance primer is needed. It is efflorescence and alkali resistant and will increase and reinforce the performance of the paints. It can be used on properly prepared concrete, concrete block, brick and stucco. Prime Seal Exterior Primer is also designed for use on exterior wood and plywood siding and trim. It can be used for priming new or previously painted walls, ceilings & wooden surfaces.

Method of Application	: Brush, Roller or Spray
Dilution	: Water Ratio 400-500ml. Per Ltr.
Drying Time	: Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	: At an interval of 2-4 hours
Coating System	: 2-3 Coats as required
Shade	: White
Packaging	: 20ltr, 10tr, 4ltr. & 1ltr

### FEATURES

- Excellent adhesion.
- Excellent hiding.
- Great flow & leveling.
- Quick drying.
- Greater Coverage.
- Low Odour.



### COVERAGE

On smooth masonry surface by brushing




**1 COAT**

215 - 270  
sq.ft/ltr

### COLOURS AVAILABLE

**White\***



Please note: Decoprime Cement Primer (WT)  
is an undercoat



EXTERIOR & INTERIOR WALLS

# PRIME SEAL

*Wall Sealer*





## INTERLUX ACRYLIC EXTERIOR PRIMER



**USES:** Interlux Exterior Primer has been manufactured for above grade masonry surfaces where a high performance primer is needed. It is efflorescence and alkali resistant and will increase and reinforce the performance of the paints. It can be used on properly prepared concrete, concrete block, brick and stucco. Interlux Exterior Primer is also designed for use on exterior wood and plywood siding and trim. It can be used for priming new or previously painted walls, ceilings & wooden surfaces.

Method of Application	: Brush, Roller or Spray
Dilution	: Water Ratio 400-500ml. Per Ltr.
Drying Time	: Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	: At an interval of 2-4 hours
Coating System	: 2-3 Coats as required
Shade	: White
Packaging	: 20ltr, 10tr, 4ltr. & 1ltr


### FEATURES

- Excellent adhesion.
- Excellent hiding.
- Great flow & leveling.
- Quick drying.
- Greater Coverage.
- Low Odour.

### DRYING TIME TO TOUCH



### WATER BASED

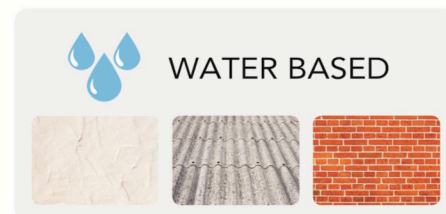



## INTERLUX INTERIOR PRIMER



**USES:** Interlux Interior Primer has been manufactured for above grade masonry surfaces where a high performance primer is needed. It is efflorescence and will increase and reinforce the performance of the paints. It can be used on properly prepared concrete, concrete block, brick and stucco. Interlux Interior Primer is also designed for use on exterior wood and plywood siding and trim. It can be used for priming new or previously painted walls, ceilings & wooden surfaces.

Method of Application	:	Brush, Roller or Spray
Dilution	:	Water Ratio 400-500ml. Per Ltr.
Drying Time	:	Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	:	At an interval of 2-4 hours
Coating System	:	2-3 Coats as required
Shade	:	White
Packaging	:	20ltr, 10tr, 4ltr. & 1ltr

### FEATURES

- Excellent adhesion.
- Excellent hiding.
- Great flow & leveling.
- Quick drying.
- Greater Coverage.
- Low Odour.





## INTERLUX UNIVERSAL WALL PRIMER

**USES:** Universal Primer has been manufactured for above grade masonry surfaces where a high performance primer is needed. It is efflorescence and alkali resistant and will increase and reinforce the performance of the paints. It can be used on properly prepared concrete, concrete block, brick and stucco.

Universal Primer is also designed for use on exterior wood and plywood siding and trim. It can be used for priming new or previously painted walls, ceilings & wooden surfaces.

Method of Application	:	Brush, Roller or Spray
Dilution	:	Water Ratio 400-500ml. Per Ltr.
Drying Time	:	Surface dry 60-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	:	At an interval of 2-4 hours
Coating System	:	2-3 Coats as required
Shade	:	White
Packaging	:	20ltr, 10tr, 4ltr. & 1ltr



### FEATURES

- Excellent adhesion.
- Excellent hiding.
- Great flow & leveling.
- Quick drying.
- Greater Coverage.
- Low Odour.



## UNIVERSAL WALL PRIMER





# WALL PUTTY COLLECTIONS

Interlux Wall putty is a specially design product manufactured with low dust technology. It is best suited to minimize paint cost and extend it's durability. It protects your expensive paint and retain its beauty for long. It is applicable on both new or old wall surfaces



# TEXTURE FINISH COLLECTIONS

Interlux Rustic Texture (sand Effect) is Marble chips and marble dust based material creates dholpur and rain drop effects(horizontal, vertical,diagonal, circular, spray and +- effects). Available in different thickness.



## INTERLUX WATERPROOF WALLPUTTY

**FINISH/GLOSSY:** Highly Durability

Waterproof Wallputty is a white cement based products with re-dispersible polymer and functional additives for application on exterior & interior rough plasters to give a smooth finish.

Method of Application	:	Knife, Trowal
Drying Time	:	Surface dry 69-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	:	At an interval of 3-6 hours
Coating System	:	2-3 Coats as required
Shade	:	White
Packaging	:	20Kg.

## FEATURES

- Applicable on both new or old wall surfaces.
- Gives a smooth & bright finish.
- Controlled water vapour permeability.
- Resists the growth of algae and fungi on wall.
- Good Intercoat adhesion to Emulsion Paints.
- Reduction in airborne dust



Luxurious  
Finish



Protection to  
Expensive Paints



No More  
Paint Flake-off



Smoother  
Whiter Surface



# UNIVERSAL WATERPROOF WALL PUTTY

PLATINUM SERIES





## INTERLUX WALLPUTTY / TEXTURE FINISH



**FINISH/GLOSSY:** Highly Durability

Wallputty is a white cement based products with re-dispersible polymer and functional additives for application on exterior & interior rough plasters to give a smooth finish.

Method of Application	:	Knife, Trowal
Drying Time	:	Surface dry 69-90 minutes/Hard dry-24-48 Hrs.
Re-coat Time	:	At an interval of 3-6 hours
Coating System	:	2-3 Coats as required
Shade	:	White
Packaging	:	40Kg. 20Kg. / Rustic 25Kg.

## FEATURES

- Applicable on both new or old wall surfaces.
- Gives a smooth & bright finish.
- Controlled water vapour permeability.
- Resists the growth of algae and fungi on wall.
- Good Intercoat adhesion to Emulsion Paints.
- Reduction in airborne dust





## INTERLUX SOLVENT BASE PRODUCTS

**PREMIUM ENAMEL:** High Gloss, Excellent Durability & More Covering.

**WHITE SURFACER PRIMER:** Its apply at all surfaces Like Wood, Metal, Wall Etc.

**BROWN PRIMER:** Excellent Durability and more covering.

**RED OXIDE METAL PRIMER:** It protect from Rust.

**RUBBER SEAL COMPOUND:** It is Bituminus Based Product. It also Protect from Rust.

Method of Application	: Brush, Roller or Spray
Dilution	: Oil Ratio 200-300ml. Per Ltr.
Drying Time	: Surface dry 1-2 Hrs /Hard dry-24-48 Hrs.
Re-coat Time	: At an interval of 2-4 hours
Coating System	: 2-3 Coats as required
Packaging	: 20ltr, 10ltr, 4ltr, 1ltr, 500ml, & 200ml.
	:





# TEZZ



## FEATURES

- Antimicrobial fungus resistant coating.
- Stains wash off easily, superior scrubability.
- Resists scuffs & stains.
- Low Odour & Low VOC.
- Moisture resistant.
- Excellent hiding, especially in dark colors









Discover the

### FREE INTERLUX PAINTS VISUALIZER APP

Multiple color schemes for Exteriors & Interiors Choose colors from over 10,000 Interlux Color Fandeck Elegant, vivid & vibrant colors available Find at your nearest Interlux Paints Stockiest



SCAN QR CODE



Mfd. By:

## ARYAN PAINTS PVT. LTD.

Works: Idgaha Road, Samsahabad (HR.)

Branch Office : F-225 A, Laxmi Nagar, Mangal Bazar Road, Delhi-110092

Website: [www.interluxpaints.com](http://www.interluxpaints.com) | E-mail: [info@interluxpaints.com](mailto:info@interluxpaints.com)

**TOLL FREE: 1800-212-3494**

## Be inspired

Fire your imagination with ideas, trends and style tips from the ARYAN PAINTS experts or find your own at [www.aryanpaints.in](http://www.aryanpaints.in)

### On Facebook



Find us on Facebook, where our colour Consultants are on hand with colour advice and top to help you achieve your perfect colour scheme. [facebook.com/interluxpaints](https://facebook.com/interluxpaints)

### Via Twitter



Check in, Pick up ideas and see what's trending with [twitter.com/interluxpaints](https://twitter.com/interluxpaints)

